




AMX Series




AM-1 Series

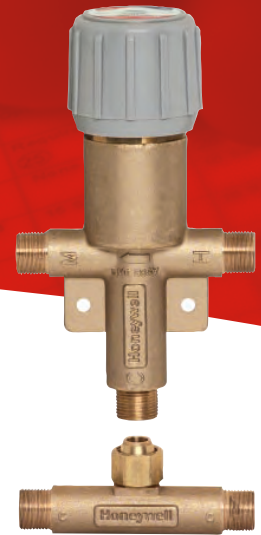


UMV-304U Series

Honeywell Thermostatic Mixing Valves Meet New Hampshire State Plumbing Code Requirements.


	AMX Series	AM-1 Series	UMV-304U Series
Designed To Prevent Scalding and Legionella Bacteria Growth – An important health feature your customers will appreciate	•	•	•
Teflon® Coating – Reduces clogging, which means fewer callbacks	•	•	
Easy Installation – Add profits, not time, to each water heater installation	•	•	
Built-In Check Valve – Prevents cross-flow of hot water	•	(union models only)	•
Direct Connection to Water Heater	•		
Universal 3- And 4-Port Model – Contractors only need to stock one product	ASSE 1017	ASSE 1016 & 1017	ASSE 1016 & 1070 Pending
Certification			




The AMX mixing valve cuts installation time and number of parts in half.



AM-1 mixing valve installation.



UMV-304 3-Port Option Typically used in public facilities and office buildings where a consistent temperature is required.



UMV-304 4-Port Option Typically used in homes, apartments, hotels and locations where the user is free to adjust the water temperature.

New Hampshire Code

Section 501.2 — Water Heater as Space Heater. Where a combination potable water heating and space heating system requires water for space heating at temperatures higher than 140° F (60° C), a tempering valve shall be provided to limit the water supplied to the potable hot water distribution system to a temperature of 140° F (60° C). The potability of the water shall be maintained throughout the system.

Section 501.6 — Water temperature control in piping from tankless heaters. The temperature of water from tankless water heaters shall be a maximum of 140° F (60° C) when intended for domestic uses.

Section 607.1 — ...Tempered water(85° F-110° F) shall be delivered from accessible hand washing facilities.