




AMX Series




AM-1 Series

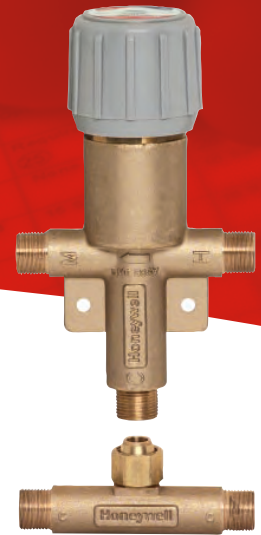


UMV-304U Series

## Thermostatic Mixing Valves Are Now Required On All New Water Heater Installations In Vermont. Honeywell Thermostatic Mixing Valves Meet These Requirements.


	AMX Series	AM-1 Series	UMV-304U Series
Designed To Prevent Scalding and Legionella Bacteria Growth – An important health feature your customers will appreciate	•	•	•
Teflon® Coating – Reduces clogging, which means fewer callbacks	•	•	
Easy Installation – Add profits, not time, to each water heater installation	•	•	
Built-In Check Valve – Prevents cross-flow of hot water	•	(union models only)	•
Direct Connection to Water Heater	•		
Universal 3- And 4-Port Model – Contractors only need to stock one product			•
Certification	ASSE 1017	ASSE 1016 & 1017	ASSE 1016 & 1070 Pending




The AMX mixing valve cuts installation time and number of parts in half.



AM-1 mixing valve installation.



UMV-304 3-Port Option Typically used in public facilities and office buildings where a consistent temperature is required.



UMV-304 4-Port Option Typically used in homes, apartments, hotels and locations where the user is free to adjust the water temperature.

### Vermont Code

**Section 501.2** — Water Heater and Space Heater, where a combination of potable water and space heating systems requires water for space heating at temperatures higher than 140° F (60° C), a master thermostatic mixing valve complying with ASSE 1017 shall be provided to limit the water supplied to the potable hot water distribution system to a temperature of 120° F (49° C) or less. The potability of the water shall be maintained throughout the system.

**Section 502.1** — Water heaters shall maintain a minimum water temperature of 140° F (60° C).

**Section 602.2** — Potable water required: Only potable water shall be supplied to plumbing fixtures that provide water for drinking, bathing or culinary purposes, or for the processing of food, medical or pharmaceutical products. Unless otherwise required by law, potable water shall be supplied to all plumbing fixtures at a maximum temperature of 120° F (49° C).